


Prorex - RFP Raised Face (RF) Protector 'Push-in'

- Standard in yellow
- Material LDPE
- DN / ANSI combination (reducing stock)
- Flang-sizes **ANSI 1/2" to 12" & DN15 to DN300**
- Made for all RF and FF flanges
- Protection during stockage, transport, painting etc. against dust, durt, animals...
- Ergonomic fast pop-in fitting

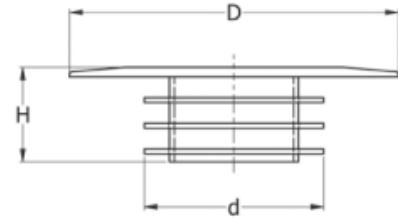

Face protectors (yellow)

Partnumber	Inner diameter ød (mm) Max	Standards DN / ANSI	Outer diameter ø D (mm)	VPE
RFP15	19.0	DN 15 - 1/2"	45	500
RFP20	24.0	DN 20 - 3/4"	58	500
RFP25	30.0	DN 25 - 1"	70	500
RFP32	39.0	DN 32 - 1.1/4"	78	500
RFP40	45.5	DN 40 - 1.1/2"	88	400
RFP50	56.5	DN 50 - 2"	102	200
RFP65	72.5	DN 65 - 2.1/2"	122	200
RFP80	85.5	DN 80 - 3"	138	150
RFP100	119.0	DN 100 - 4"	163	100
RFP125	143.0	DN 125 - 5"	190	100
RFP150	170.0	DN 150 - 6"	215	50
RFP200	221.0	DN 200 - 8"	270	30
RFP250	275.0	DN 250 - 10"	345	20
RFP300	325.0	DN 300 - 12"	408	10



Partnumber	Flanges Nom. ø	Cl.	PN
RFP15	DN 15 - 1/2"	150-300-400-600-1500-2500	10-16-25-40-64-100-160-250-300
RFP20	DN 20 - 3/4"	150-300-400-600-1500-2500	10-16-25-40-64-100-160-250-300
RFP25	DN 25 - 1"	150-300-400-600-1500-2500	10-16-25-40-64-100-160-250-300
RFP32	DN 32 - 1.1/4"	150-300-400-600-1500-2500	10-16-25-40-64-100-160-250-300
RFP40	DN 40 - 1.1/2"	150-300-400-600-1500-2500	10-16-25-40-64-100-160-250
RFP50	DN 50 - 2"	150-300-400-600-900	10-16-25-40-64-100-160-250
RFP65	DN 65 - 2.1/2"	150-300-400-600-900	10-16-25-40-64-100-160
RFP80	DN 80 - 3"	150-300-400-600	10-16-25-40-64-100-160
RFP100	DN 100 - 4"	150-300-400	10-16-25-40-64-100-160
RFP125	DN 125 - 5"	150-300-400	10-16-25-40-64-100-160
RFP150	DN 150 - 6"	150-300-400	10-16-25-40-64-100-160